

# ABS-Lock<sup>®</sup> X-H-24



LX-H-24



MoA 198-02





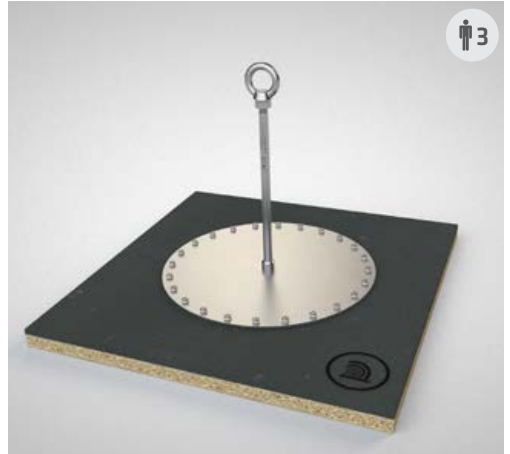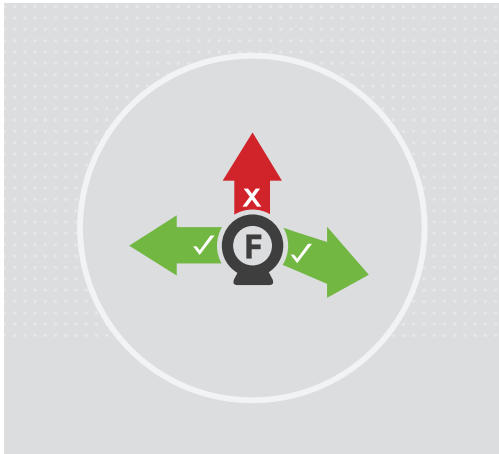


**X** max.  
 15 mm  
**OPTIONAL**

**Y** min.  
 18 mm  
**HOLZ**  
**WOOD**

**Y** min.  
 12 mm  
**OSB**




 T25

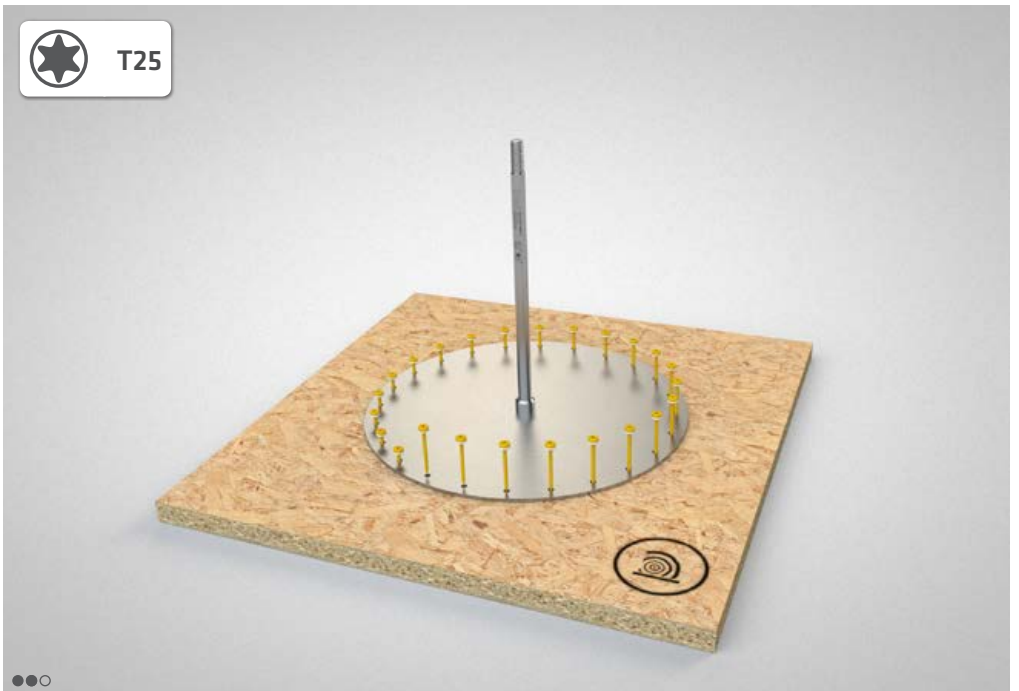


• Nm  24  
 70 Nm





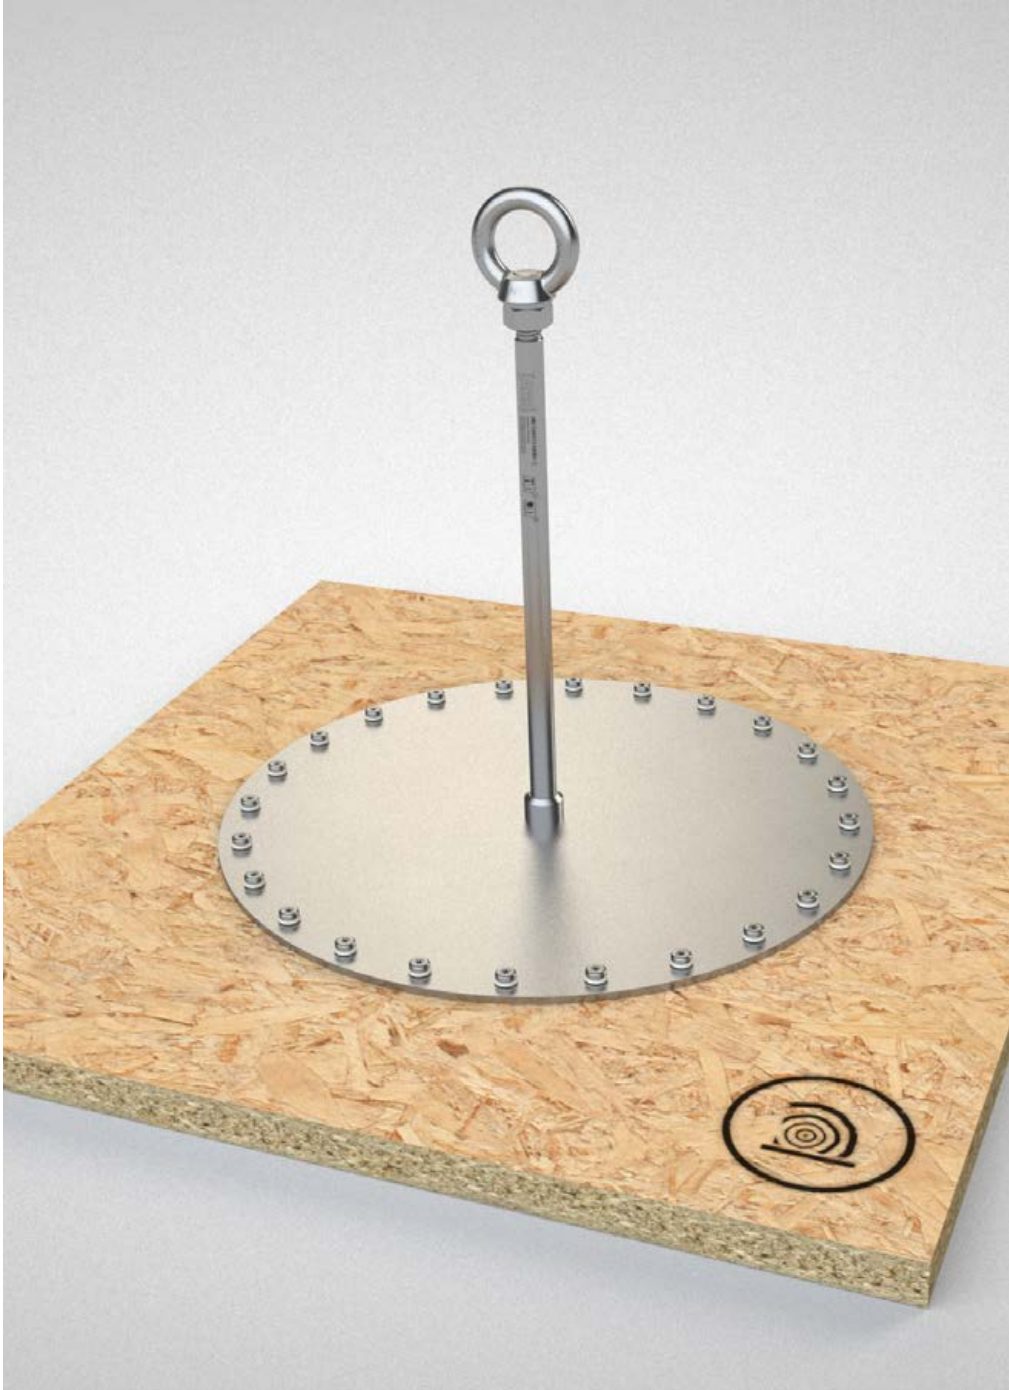

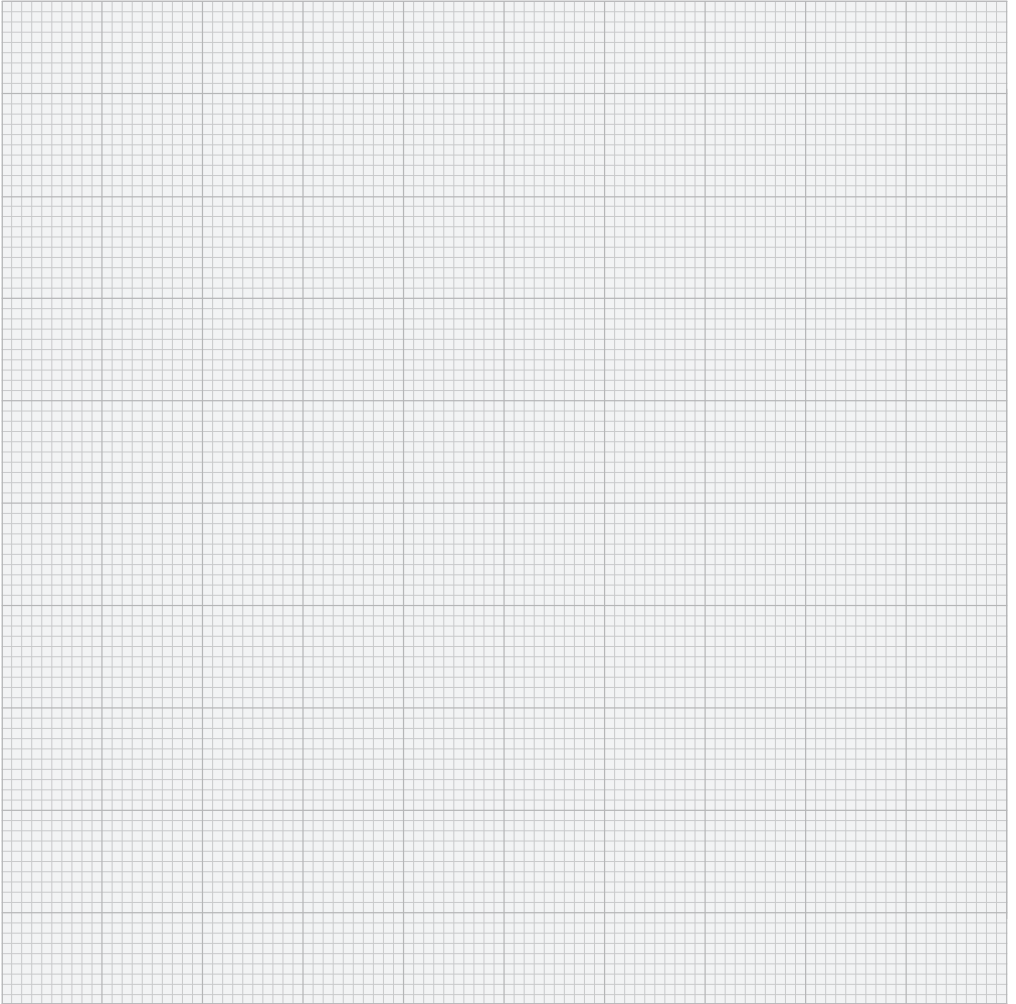

---

---

---

---

---

---

---

---

# ALWAYS ON TOP!

## **ABS Safety GmbH**

Gewerbering 3  
D-47623 Kevelaer  
Germany

Tel.: +49 (0) 28 32 - 972 81 - 0  
Fax: +49 (0) 28 32 - 972 81 - 29

[info@absturzschutz.de](mailto:info@absturzschutz.de)

[www.absturzschutz.de](http://www.absturzschutz.de)  
[www.protection-anti-chute.fr](http://www.protection-anti-chute.fr)  
[www.fall-arrest.eu](http://www.fall-arrest.eu)

RS 12, September 2017



[youtube.com/abssafetygmbh](https://youtube.com/abssafetygmbh)



[facebook.com/ABS.Safety](https://facebook.com/ABS.Safety)